



TECHNICAL REFERENCE SPECS

Pump Package	Lion
Type	Duplex
HP	20
Voltage	480/3
FLA	25
Connection Size	4" 150# Flg
Max Flow Condition	300 GPM @ 63 PSI
Max Boost Condition	60 GPM @ 116 PSI
Max Building Size	15 Floors Of Typical Office Building with Cooling Tower Load
Dry Weight	1200 Lbs.




Lion Rental Pump - Iso View

[CLICK TO EMAIL & REQUEST RENTAL](#)

RENTAL PUMP PACKAGE FEATURES

- Rental Package is on a 30" X 60" X 73" cart with casters.
- Cougar Controls VFD Panel with Through the Door Disconnect and VFD Controller.
- Piping includes:
 - Isolation Valves
 - Check Valve
 - Gauges
 - Pressure Sensing Devices
- Grundfos CR Series vertical multi-stage pump.
- **Field Install requirements (not included in Rental)**
 - Field Plumbing Required*
 - Pipe to the suction and Discharge Connections on the package
 - No isolation or check valves required
 - Field Electrical Required*
 - Incoming 480/3 Circuit to control panel
 - 50FT SO cable pre-wired to control panel
 - Components on skid are pre-wired to the control panel.
- Rental includes Start Up of the system.

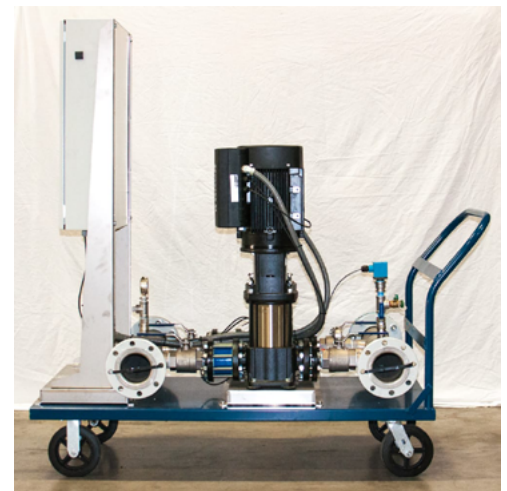

Lion Rental Pump - Side View

